


Features

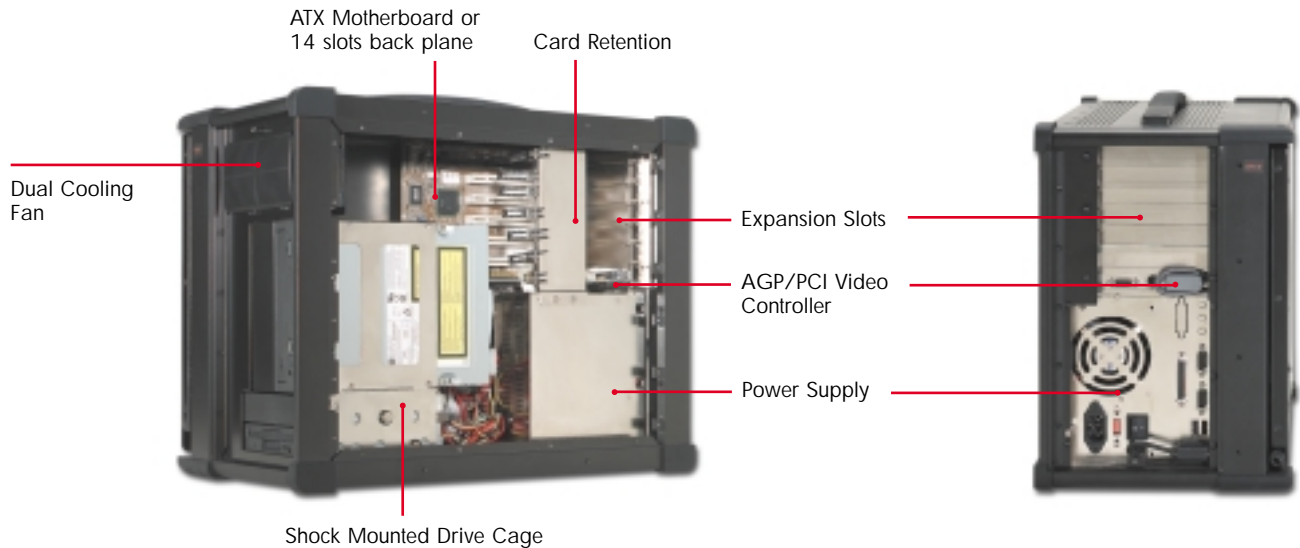

General Case Construction

ATX single/dual CPU layout motherboard support
Supports Pentium II, Pentium III processors
All aluminum chassis
Aluminum outer shell
Rubber protected corner
Add-on card stabilizer
Drive shock-mount
Air circulation fan with filter
LED indicator for power and HDD
5.25" Drive bay x 2 & 3.5" Drive bay x 2
3mm impact-resistant LCD screen glass
Four full-length slots access
Three half-length slots access
300 watt ATX power supply
Detachable water-resistant 104/105 keys keyboard
Built-in pointing device
Soft wheeled carrying case

Environment

Operating temperature	5C to 40C, 10-80% humidity
Storage temperature	-20C to 60C, 5-95% humidity

Dimensions & Weight

Dimensions	17.2" W x 13.4" H x 9.3" D 438mm x 340mm x 236mm
Weight	SKD 12.5kg. / 27.5lbs System 15kg / 33lbs

Display Selection

Model	TX13 / TX15	SX-15
Display Type	Active Matrix TFT	Active Matrix TFT
Display Colors	262K / 16.7 Million	16.7 Million
Size	13.3" / 15.1"	15.4"
Resolution	1024x768	1280x1024
High Brightness	100 / 200 (cd/m ²)	200 (cd/m ²)
Response Time	40ms	40ms
Contrast Ratio	150 :1	200:1



Trans 2000 Inc.

Corporate Headquarters

11606 E. Washington Blvd, Ste. F
Whittier, CA 90606
Tel: 562-908-6814
Fax: 562-908-6819
Web Site: <http://www.trans2000.com>

European Sales Office

28 Kennylands Road
Sonning Common
Oxfordshire, RG4 9JT England
Tel: 44-1189-722266
Fax: 44-1189-721012
email: uk-sales@trans2000.com

European Sales Office

Laerchenweg 59a
D-85757 Karlsfeld
Germany
Tel: 49-8131-58604
Fax: 49-8131-58654
email: de-sales@trans2000.com

Asia-Pacific Sales Office

No. 51, Chien Kuo 1 Rd.
Hsin Chuang City
Taipei Hsien, Taiwan
Tel: 886-22-901-0607
Fax: 886-22-901-0609
email: asia-sales@trans2000.com

All trademarks are registered by their respective companies. Technical information in this document is subject to change without notice. Product specification is subjected to change and is based on actual production unit. Please check with Trans 2000 sales department for accuracy.